



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Global ISO Valves for the Rail Industry

ISO 5599-1 - 1, 2 and 3 sizes

Catalogue PDE2607TCUK 04/2022



ENGINEERING YOUR SUCCESS.

Global ISO Valves for the Rail Industry

Summary.....	2
Isomax Railway applications.....	3
ISO specification.....	4 - 5
Generalities.....	6 - 7
Flow.....	8
Material specification and Characteristics.....	9
Order Chart.....	10
Order codes.....	11
Subbases and manifolds.....	12 - 13
Solenoids and accessories.....	14
Dimensions.....	15 - 17



Important !

Before carrying out any service work, ensure that the valve and manifold have been vented. Remove the primary supply air hose to ensure total disconnection of the air supply before dismantling valves or blank connection blocks.



NB !

All technical data in this catalogue is typical only. The air quality is decisive for the valve life: see ISO 8573.



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).



Global ISO Valves for the Rail Industry

The Isomax Railway range of directional control valves, ISO5599-1

DX1 1/4", size 1,

DX2 3/8", size 2,

DX3 1/2", size 3,

includes both 5/2 and 5/3 valves, for pneumatic and electrical actuation with a wide choice of subbases and manifolds to suit different application needs in the Railway market.

ISO 5599 - 1



Parker's many years of experience in designing pneumatic products and systems for the rail industry has produced a depth of 'industry specific' knowledge unrivalled in the market place, with a wealth of products, both standard and custom built ideally suited to a wide range of applications.

Throughout Europe Parker have a team of Application Engineers and Design and System Engineers who work closely with customers to understand their requirements and to ensure the optimum engineering solution is provided.

The principal application areas that ISOMAX Railway have experience in include :

Door Step Control

Trip Cock Reset Valves

Coupling Systems

Horn

Sanding Control Systems

Whistle

Pantograph Operation

**Internal and External Door
Actuation and Control**

Parking Brake



Global ISO Valves for the Rail Industry

ISO Specifications

Common for Railway



5599-1



ISO 5599-1

External electrical connection subbase valves

The ISO Standard 5599-1 specifies an interface pattern for a common subbase valve consisting of pressure passages 1, 3, 5, 2 & 4 and pilot passages 12 & 14. The width of the pattern and location of the 4 bolt holes are also specified. There are no specifications for the type of external electrical connection used to control the valve.

Size : 1 2 3

Other specifications not used for Railway (for information)



5599-2

Body-to-base plug-in subbase valves

Same as 5599-1 for pneumatic pressure passages, 5599-2 standard also specifies a plug-in electrical connection.

Sizes : 1 2 3

15407-1 (VDMA 24563)

External electrical connection subbase valves

The ISO Standard 15407-1 specifies an interface pattern for a common subbase valve consisting of pressure passages 1, 3, 5, 2 & 4 and pilot passages 12 & 14. The width of the pattern and location of the 4 bolt holes are also specified. There are no specifications for the type of external electrical connection used to control the valve.

Size : 02 01

15407-2



Body-to-base plug-in subbase valves

Same as 15407-1 for pneumatic pressure passages, 15407-2 standard also specifies a plug-in electrical connection.

Size : 01 02

Global ISO Valves for the Rail Industry

ISO Specifications

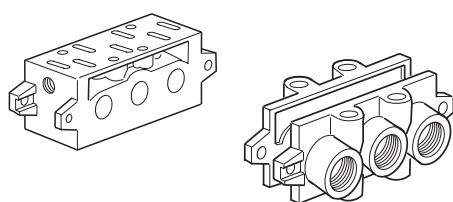

CNOMO 06-05-01

The solenoid pilot interface often used with ISO 5599-1 valves is the CNOMO interface. The CNOMO interface specifies the pressure and actuator port, and the screw holes for the mounting of this solenoid pilot. It is commonly used in European automotive plants, and its usage is becoming more prevalent for industrial ISO 5599-1 valves.

VDMA 24345

The VDMA 24345 is a standard for Manifolds and Subbase specifying a common base mounting footprint in addition to ISO 5599-1 Interface standard. (VDMA is a German organisation - Verband Deutscher Maschinen und Anlagen-Bauer - which is translated to Federation of German Machine and Unit Builders.)

Choice of components for air supply to cylinders

In the chart below can you find the suitable valves, tubes etc. for each cylinder size. If you have a tube length over 2 m, choose one tube size larger than in the chart.


Following data is valid :

Supply pressure : min 7,0 bar


Regulator pressure setting : 6,0 bar

Pipe length between air treatment unit and valve : max 1 m

Pipe length between valve and cylinder : max 2 m

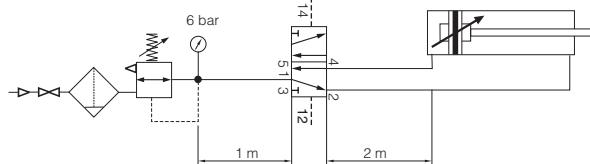


Cylinder bore	<Ø20	Ø20-32	Ø40-50	Ø63	Ø80	Ø100	Ø125	Ø160	Ø200
Cylinder port	M5	G1/8	G1/4	G3/8	G3/8	G1/2	G1/2	G3/4	G3/4
Tubing Ext / Int	4 / 2.7	6 / 4	8 / 6	10 / 7	10 / 7 12 / 9	12 / 9 14 / 11	14 / 11	18 / 15	20 / 18
Size 1 Isomax	G1/4	G1/4	G1/4	G1/4	G1/4	G1/4			
Size 2 Isomax				G3/8	G3/8	G3/8	G3/8		
Size 3 Isomax					G1/2	G1/2	G1/2	G1/2	G1/2

 Cylinder speed < 0.5 m/s  Cylinder speed < 1 m/s  Cylinder speed > 1 m/s

Global ISO Valves for the Rail Industry

• Rust and Corrosion resistance Design :

- Metal body.
- Thick anodised aluminium casting.
- Stainless steel screws and armature.

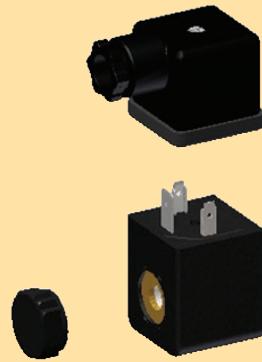


- **Coil :**
- IP 65 , thermoplastic.
- + / - 30 % Voltage tolerance.
- DC range (12 to 110 V DC).



- **Metal body :**
Corrosion resistance design.

- **Armature :**

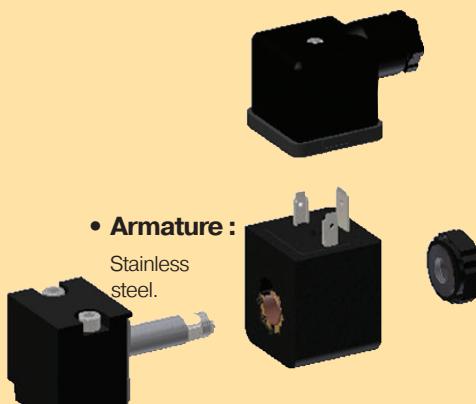

- **Operating temperature :**

- 15 °C + 60 °C.


- **Shock and Vibration :**

IEC 61373 : 1999
Cat 1

• Ceramic technology

- **Stable long lasting performances :**

Low friction switching : minimum wear of the valve member/seal assembly.

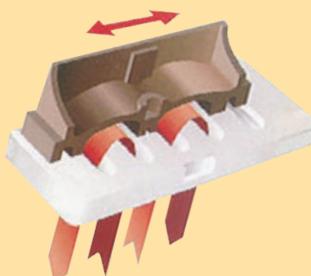

- **Excellent reliability :**

Long life in excess of 100 million operation, subject to the air supply being filtered to ISO 8573-1 standard.

- **High performances :**

Slide valve concept allows high flow / size ratio and short response time due to short slide stroke and low friction.

Global ISO Valves for the Rail Industry


Rust and corrosion resistant body

With the valve body in polyamide reinforced fiberglass and the casting in thick anodised aluminium, stainless steel screws Isomax Railway presents a comprehensive modern design to suit most Railway applications.

External supply selection

In order to use actuator with low pressure, it is possible to connect an external pressure on port 14 to supply both solenoids. Selection is easily made by reversing the gasket under the operator.

High reliability



Valves easily comply with the requirements for the component reliability in accordance with EU Machinery Directive standards EN292-2 and EN983.

Ceramic technology

Isomax Railway is developed with ceramic technology allowing

- Stability
- Long performance reliability
- Pressure through exhaust port.

Manual Override


Without manual override as standard, due to safety choice. As option, solenoids are available with flush (locking or non-locking), or extended non-locking metal manual overrides; so that valves can be operated when the electrical supply is turned off.

Solenoid valves, CNOMO interface



Valve is fitted with a 30mm solenoid having DIN 43650 Industrial form A. Operator body in thick anodised aluminium, stainless steel screws and armature allows compatibility with Railway applications.

High electrical encapsulation class




The solenoid valves are protected to IP65 with the standard cable plug.

Wide choice of solenoid connectors/cable plugs




Solenoid connectors are available with or without LED and rectifier.

Bottom or side ported manifold

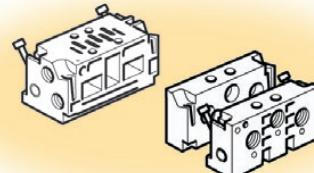

Manifolds with common ducts for ports 1,3 and 5, outlet port 2 and 4, and supply port for 12 and 14 are available side or bottom ported. Those manifolds are common for Isomax and Isys Iso.

Subbase installation VDMA

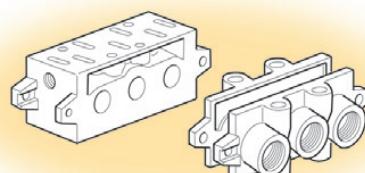

A large range of subbase, VDMA or not VDMA, bottom or side ported.

Global ISO Valves for the Rail Industry




Isomax Flow Characteristics

Flow capacities in accordance with ISO6358, for 5/2 function. 5/3 function are around 10 to 20% less.



Technical Data Isomax Size 1

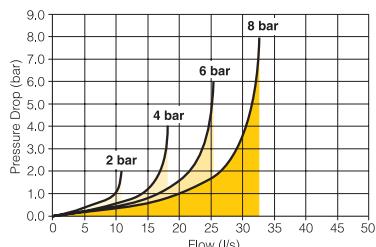

Operating pressure :

5/2 Spring return	4,0 - 10 bar
5/2 Double solenoid	2,5 - 10 bar
5/3 Double solenoid	4,0 - 10 bar

Pneumatic version :

12 bar

Working temperature :

-15 °C to + 60 °C

Flow (acc. to ISO 6358) :


c = 3,8 NI/s x bar

b = 0,35

Qn = 17,2 l/s

Qmax = 25,5 l/s

Technical Data Isomax Size 2

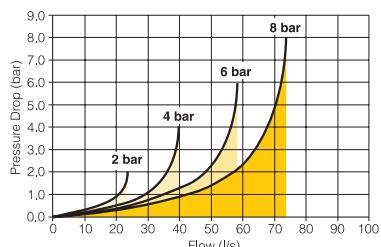

Operating pressure :

5/2 Spring return	4,0 - 10 bar
5/2 Double solenoid	2,5 - 10 bar
5/3 Double solenoid	4,0 - 10 bar

Pneumatic version :

12 bar

Working temperature :

-15 °C to + 60 °C

Flow (acc. to ISO 6358) :


c = 8,2 NI/s x bar

b = 0,35

Qn = 38,3 l/s

Qmax = 58,7 l/s

Technical Data Isomax Size 3

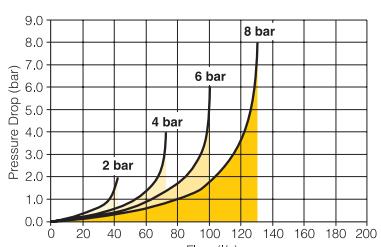

Operating pressure :

5/2 Spring return	4,0 - 10 bar
5/2 Double solenoid	2,5 - 10 bar
5/3 Double solenoid	4,0 - 10 bar

Pneumatic version :

12 bar

Working temperature :

-15 °C to + 60 °C

Flow (acc. to ISO 6358) :

c = 14,5 NI/s x bar

b = 0,35

Qn = 64,0 l/s

Qmax = 101,0 l/s

Railway Solenoid Characteristics



Operating pressure :

3/2 Spring return	0,0 - 10 bar
-------------------	--------------

Working temperature :

-40 °C to 60 °C (1)

Flow (acc. to ISO 6358) :

Qn = 0,7 l/s

(1) limited to 50°C if use with 100% duty cycle.
Increase of leakage below -25 %C.

Global ISO Valves for the Rail Industry

Material Specification and Characteristics

Isomax Railway Valve

Material

Valve member - seat :	Self lubricating acetal - ceramic
Body :	Polyamide reinforced fibreglass
Casing - End plates :	Anodised aluminium
Valve plate :	Zamak
Seals :	Nitrile
Springs :	Stainless steel
Screws :	Stainless steel

Railway Solenoid

Pilot Valve

Body :	Aluminium
Armature tube :	Stainless steel
Plunger & core :	Corrosion resistant Cr-Ni steel
Seals :	Low temp FKM
Screws :	Stainless steel

Coil

Encapsulation material :	Thermoplastic as standard
--------------------------	---------------------------

Characteristics

Fluid :	Air or inert gas filtered 40 µ class 5 according to ISO 8573-1 dry class according to service temperature non-lubricated, or lubricated
Storage temperature :	-40 °C to + 70°C
Low temperature climatic :	According to EN 60068-2-1, test Ad
High temperature climatic :	According to EN 60068-2-2, test Bd
Shock and Vibration :	According to IEC 61373 : 1999 Cat 1 Class B
Salt spray test :	According to ISO 9227, 168 h
Solenoid orifice :	1.2/1.3mm
Power (DC) :	6 to 6.8W
Voltage tolerance :	+/- 30%
Pull in voltage :	According to VDE 0580 July 2000
Duty cycle :	100%
Insulation :	Class II 2000 V
Temperature :	Class F 155 °C
Electrical connection :	Din A

Certification

EMC / CE mark. :	According to EN 61 000-6-2
Dust & water protection :	IP65 according to EN 60529


Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors/cable plugs EN 175301-803 with LED's include this type of circuit protection.

Global ISO Valves for the Rail Industry

Isomax - ISO 5599 - Size 1 / 2 / 3 - CNOMO

Order chart

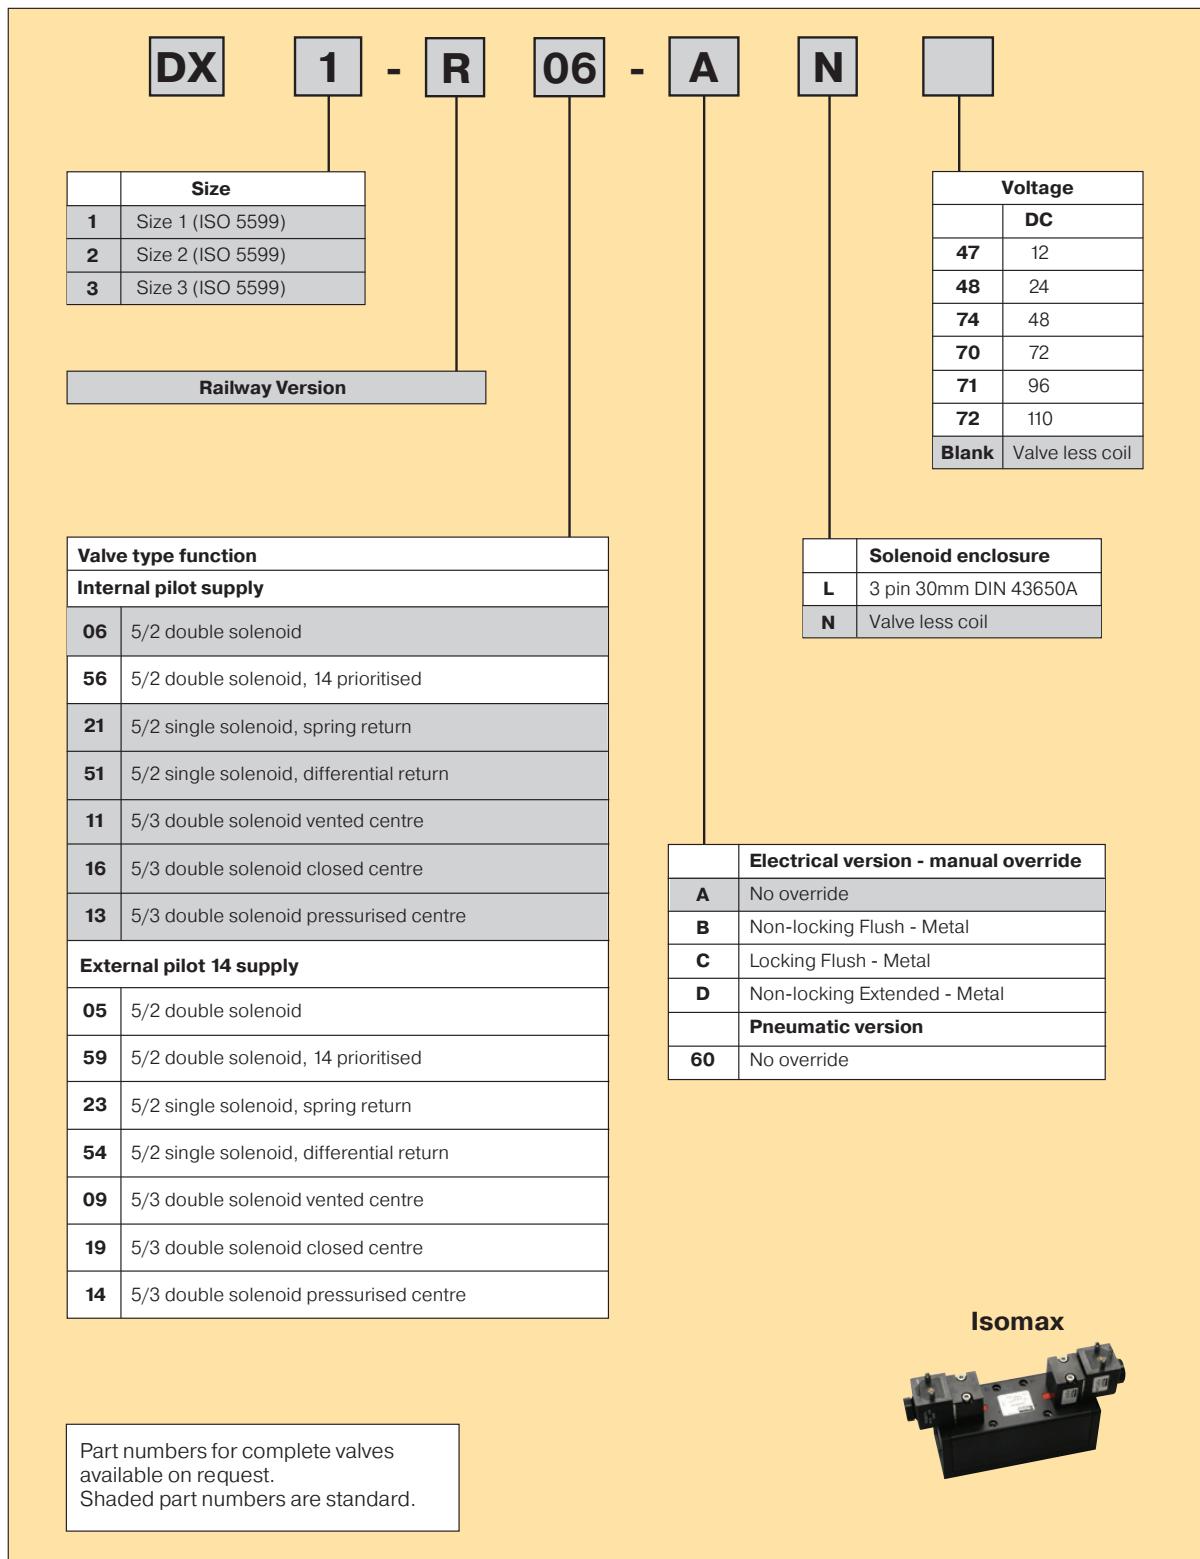

Global ISO Valves for the Rail Industry

Solenoid operated ISO Railway Valve fitted with CNOMO operator without coil

Solenoid plug/connector to be ordered separately. See page 14.

Symbol	Size	Actuation	Return	Changeover time (ms) at 6 bar 20 °C actua./return	Weight	Order code
kg						
5/2 Valves						
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Electrical signal Electrical signal Electrical signal	Spring Spring Spring	40/55 60/105 85/160	0.400 0.650 1.150	DX1-R21-AN DX2-R21-AN DX3-R21-AN
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Electrical signal Electrical signal Electrical signal	Differential Differential Differential	30/70 55/110 80/180	0.400 0.650 1.150	DX1-R51-AN DX2-R51-AN DX3-R51-AN
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Electrical signal Electrical signal Electrical signal	Electrical signal Electrical signal Electrical signal	25/25 30/30 40/40	0.550 0.800 1.300	DX1-R06-AN DX2-R06-AN DX3-R06-AN
5/3 Valves						
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Electrical signal Closed centre	Electrical signal Self centering	30/95 40/190 55/330	0.550 0.800 1.300	DX1-R16-AN DX2-R16-AN DX3-R16-AN
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Electrical signal Vented centre	Electrical signal Self centering	25/70 40/140 60/270	0.550 0.800 1.300	DX1-R11-AN DX2-R11-AN DX3-R11-AN
	1 - 43 mm 2 - 56 mm	Electrical signal Press. centre	Electrical signal Self centering	25/65 40/150	0.550 0.800	DX1-R13-AN DX2-R13-AN

Indicates stocked products.

Pneumatic operated ISO Railway Valve without valve spool override


Symbol	Size	Actuation	Return	Changeover time (ms) at 6 bar 20 °C actua./return	Weight	Order code
kg						
5/2 Valves						
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Air signal Air signal Air signal	Spring Spring Spring	30/45 50/95 80/160	0.350 0.600 1.100	DX1-R21-60 DX2-R21-60 DX3-R21-60
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Air signal Air signal Air signal	Differential Differential Differential	25/60 45/100 70/170	0.350 0.600 1.100	DX1-R51-60 DX2-R51-60 DX3-R51-60
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Air signal Air signal Air signal	Air signal Air signal Air signal	20/20 25/25 35/35	0.350 0.600 1.100	DX1-R06-60 DX2-R06-60 DX3-R06-60
5/3 Valves						
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Air signal Closed centre	Air signal Self centering	20/80 30/170 45/330	0.350 0.600 1.100	DX1-R16-60 DX2-R16-60 DX3-R16-60
	1 - 43 mm 2 - 56 mm 3 - 71 mm	Air signal Vented centre	Air signal Self centering	20/65 30/140 50/270	0.350 0.600 1.100	DX1-R11-60 DX2-R11-60 DX3-R11-60
	1 - 43 mm 2 - 56 mm	Air signal Press. centre	Air signal Self centering	20/60 25/140	0.350 0.600	DX1-R13-60 DX2-R13-60

Global ISO Valves for the Rail Industry





ISO 5599-1 Subbase & Manifolds

VDMA Side Ported Subbases

Description	Size	Port size	Weight kg	Order code
				
Subbases VDMA Side port according to VDMA Side port according to VDMA Side port according to VDMA	1 - 43 mm 2 - 56 mm 3 - 71 mm	G1/4 G3/8 G1/2	0.160 0.280 0.350	P2N-VS512SD P2N-WS513SD P2N-YS514SD

VDMA Bottom Ported Manifold

Description	Size	Port size	Weight kg	Order code
				
VDMA Form C Bottom port according to VDMA Bottom port according to VDMA Bottom port according to VDMA	1 - 43 mm 2 - 56 mm 3 - 71 mm	G1/4 G3/8 G1/2	0.240 0.360 0.700	P2N-VM512MB P2N-WM513MB P2N-YM514MB
VDMA Transition plate Size 1 to Size 3	1 to 3	G1/4		P2N-VM500AK
Kit includes : Transition plate only				
				
VDMA Form D - End plate According to VDMA According to VDMA According to VDMA	1 - 43 mm 2 - 56 mm 3 - 71 mm	G3/8 G1/2 G1	0.210 0.360 0.680	P2N-VM513ES P2N-WM514ES P2N-YM518ES
VDMA Isolation - Main galley According to VDMA According to VDMA According to VDMA	1 - 43 mm 2 - 56 mm 3 - 71 mm			P2N-VK0P P2N-WK0P P2N-YK0P
Kit includes : (1) Isolator plug.				

Accessories

Description	Size	Port size	Weight kg	Order code
				
Blanking plate	1 - 43 mm 2 - 56 mm 3 - 71 mm	G1/4 G3/8 G1/2	0.100 0.150 0.200	P2N-AA5B P2N-BA5B P2N-CA5B
Kit includes : (1) Blanking plate, (1) Gasket and (4) Mounting bolts				

 Indicates stocked products.



ISO 5599-1

Global ISO Valves for the Rail Industry




Side ported subbases

Description	Size	Port size	Weight kg	Order code BSP	
	Single subbase 13 5 2 4 ports & 12 14	1 - 43 mm 1 - 43 mm	G1/4 G3/8	0.160 0.160	PL1-1/4-70 PL1-3/8-70
	2 - 56 mm 2 - 56 mm	G3/8 G1/2	0.280	PL2-3/8-70 P2N-HS514SS	
	3 - 71 mm 3 - 71 mm	G1/2 G3/4		PL3-1/2-70 P2N-JS516SD	

Bottom ported subbases

Description	Size	Port size	Weight kg	Order code BSP	
	Single subbase 13 5 2 4 ports & 12 14	1 - 43 mm 2 - 56 mm 3 - 71 mm	G1/4 G3/8 G1/2	0.370 0.590 0.590	PD1-1/4-70 PD2-3/8-70 PD3-1/2-70

Size 1 bottom ported manifold

Description	Size	Port size	Weight kg	Order code
 Manifold With bottom ports low profile	1 - 43 mm	G1/4	0.200	P2N-AM512MB
 Connecting block Top or bottom ported connecting block for above manifold "low profile"	1 - 43 mm	G3/8	0.150	P2N-AM513GT
 End End piece for above manifold "low profile"	1 - 43 mm	no	0.060	P2N-AM500J
 Intermediate supply Top or bottom ported intermediate supply for above manifold "low profile"	1 - 43 mm	G3/8	0.140	P2N-AM513BT
 Isolation plugs Isolating seal for above manifold "low profile"	1 - 43 mm		0.070	P2N-AK0P

Sizes 1 & 2 side ported manifold

Description	Size	Port size	Weight kg	Order code
 Manifold Manifold with side ports	1 - 43 mm 2 - 56 mm	G1/4 G3/8	0.240 0.210	P2N-EM512MD P2N-FM513MD
 End Side ported connecting kit for above manifold with side ports	1 - 43 mm 2 - 56 mm	G3/8 G1/2	0.360 0.290	P2N-EM513ES P2N-FM514ES

 Indicates stocked products.



Global ISO Valves for the Rail Industry



Solenoid coils with Din A 30 x 30 connection

Voltage	Order code	Weight (kg)
Direct current		
12V DC	P2FCA447	0.105
24V DC	P2FCA448	0.105
48V DC	P2FCA474	0.105
72V DC	P2FCA470	0.105
96V DC	P2FCA471	0.105
110V DC	P2FCA472	0.105

Spare Solenoid Nut

Diffuser nut for vented exhaust

Description	Order code	Weight (kg)
Plastic Version	P2FND	0.010
Metalic Version	P2FNPR	0.020

Spare Solenoid Operators

Solenoid pilot operator CNOMO NC

Description	Order code No manual override	Weight (kg)	Order code Non-lock. manual override	Weight (kg)	Order code Locking manual override	Weight (kg)
Mobile metal	P2FP43M4A	0.100	P2FP43M4B	0.100	P2FP43M4C	0.100

Note.

Solenoid pilot operators are fitted to the Isomax Railway valve range. Order the above part numbers for spares. The operators are supplied with mounting screws and interface 'O' rings.

Coils and connectors must be ordered separately.

Solenoid Connectors / Cable Plugs 30 mm Form A ISO4400



	Description	Order code
With standard screw	Standard IP65 without flying lead	3EV290V10
	With LED and protection 24V AC/DC	3EV290V20-24
	With LED and protection 110V AC	3EV290V20-110
With cable	24V AC/DC, 5m cable LED and protection IP65	3EV290V20-24L5
	110V AC/DC, 5m cable LED and protection IP65	3EV290V20-110L5

 Indicates stocked products.


Global ISO Valves for the Rail Industry

Railway Isomax Valve - Dimensions (mm)

Pneumatically actuated


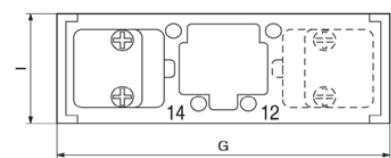
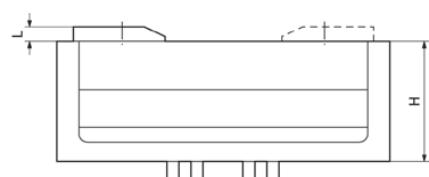


With P2F solenoids

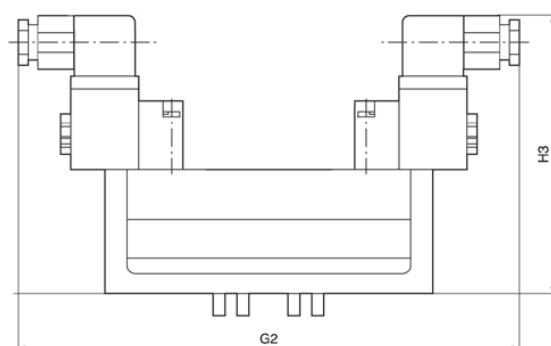


	G	G2	H	H3	I	L
Size 1	120	196	46	114	42	5
Size 2	140	206	58	126	54	5
Size 3	170	224	72	140	68,5	5

Solenoid operators (Mobile Metal) - 30 x 30mm

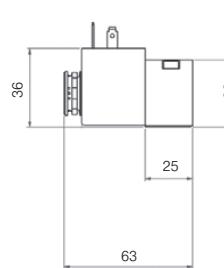


Cable plugs
3EV290V10

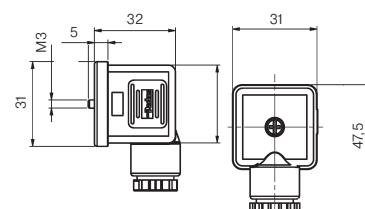


Global ISO Valves for the Rail Industry

Single subbase with side ports according to VDMA - Dimensions

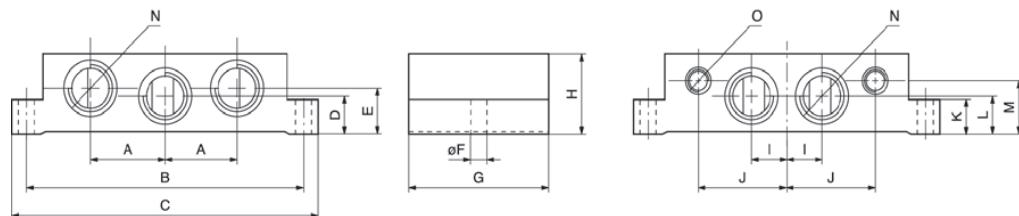


Order code	Size ISO	Port Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
P2N-VS512SD	1	G1/4	21,5	98	110	11	20	5,5	48	32	12	29	10	11	23	G1/4	G1/8
P2N-WS513S	2	G3/8	28	112	124	14	26	6,6	56	40	15	37	13	14	30	G3/8	G1/8
P2N-YS514SD	3	G1/2	34	136	149	17	17	6,6	71	32	16	45	18	17	22	G1/2	G1/8

Single subbase with side ports

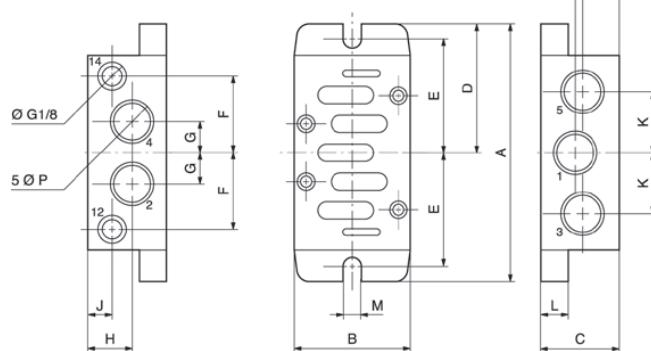

Order code	ISO Size	ØP	A	B	C	D	E	F	G	H	J	K	L	M	N	R
PL1-1/4-70	1	G1/4	110	46	29	55	49	30	11	17,75	17,75	22	6	5,5	17,75	17,75
PL2-3/8-70	2	G3/8	124	56	37	62	55	37	14,5	22,5	14	28	6	5,5	22,5	14,5
P2N-JS516SD	3	G3/4	149	71	60	74,5	68	45	21	33	10	40	18	6,6	37,5	22,5


Single subbase with bottom ports

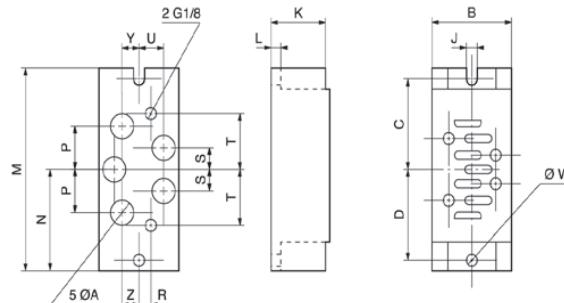

Order code	A	B	C	D	J	K	L	M	N	P	R	S	T	U	W	Y	Z
PD1-1/4-70	G1/4	46	49	49	5,5	29	6	110	55	22	10	11	30	10	5,5	10	10
PD2-3/8-70	G3/8	56	55	55	5,5	37	6	124	62	29	10	14,5	37	12,5	5,5	12,5	12,5
PD3-1/2-70	G1/2	77	68	68	6,6	32	18	149	74,5	34	10	17	45	17	6,5	17	17


Global ISO Valves for the Rail Industry

Manifold and end plates according to VDMA (P2N-VM / WM / YM) - Dimensions

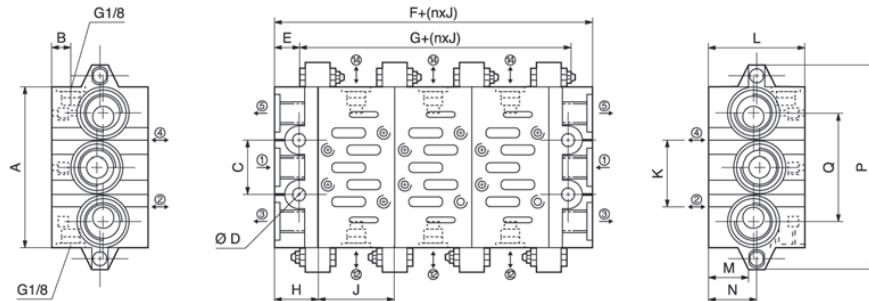


ISO Size	Port 1, 3, 5	Port 2, 4	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
1	G3/8	G1/4	85	8,5	28	7	11	44	22	22	43	26	46	21	24	56	110
2	G1/2	G3/8	100	9	35	9	13	52	26	26	56	30	47	22	24	68	135
3	G1	G1/2	140	10	52	12	15	60	30	30	71	38	56	31	34	104	190

Manifold and end plates with bottom ports "low profile" (P2N-AM..)

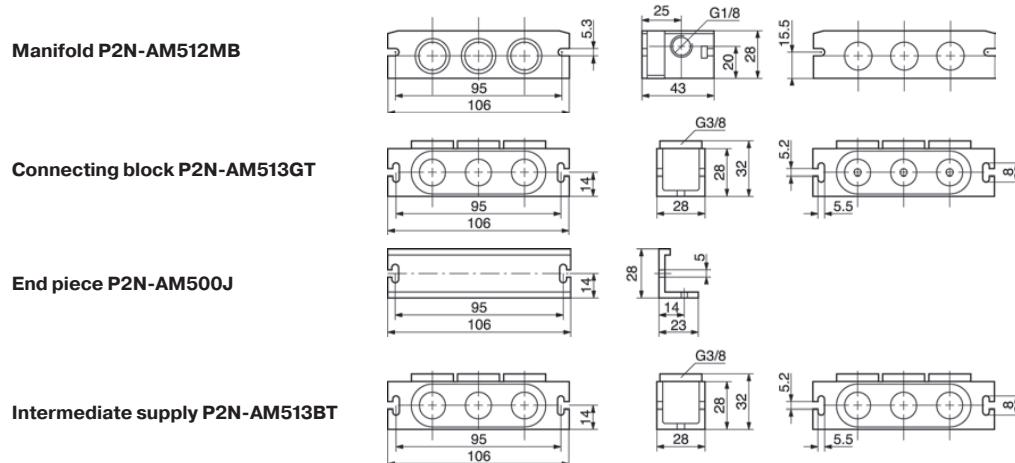

Manifold and end plates with side ports (P2N-EM / FM..)

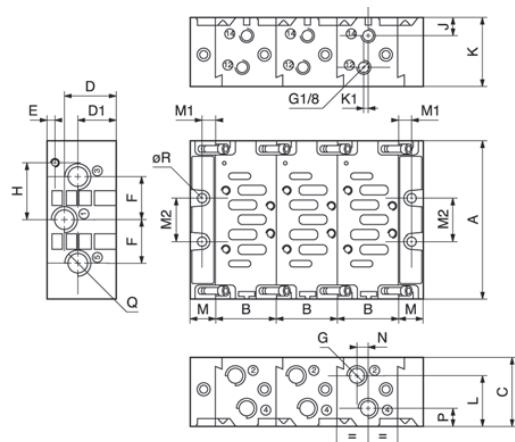

Order code	A	B	C	D	D1	E	F	G	H	J	K	K1	L	M	M1	M2	N	P	Q	R
P2N-EM...	110	43	48	35,5	26,5	5,5	28	G1/4	36	15,5	35	3	32	20	11	28	12	12,5	G3/8	6
P2N-FM...	129	56	60	44,5	35,5	6	34,5	G3/8	45	16	41,5	3	41	24	13	35	12,5	16	G1/2	8

Global ISO Valves for the Rail Industry



Global ISO Valves for the Rail Industry



Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100

AT – Austria, St. Florian
Tel: +43 (0)7224 66201

BE/NL/LU – Benelux, Hendrik Ido Ambacht
Tel: +31 (0)541 585 000

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00

CZ – Czech Republic, Prague
Tel: +420 284 083 111

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0

DK – Denmark, Ballerup
Tel: +45 43 56 04 00

ES – Spain, Madrid
Tel: +34 902 330 001

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25

HU – Hungary, Budaörs
Tel: +36 23 885 470

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370

IL – Israel
Tel: +972 02 45 19 21

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21

NO – Norway, Asker
Tel: +47 66 75 34 00

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00

PT – Portugal
Tel: +351 22 999 7360

RO – Romania, Bucharest

Tel: +40 21 252 1382

RU – Russia, Moscow
Tel: +7 495 645-2156

SE – Sweden, Borås
Tel: +46 (0)8 59 79 50 00

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650

TR – Turkey, Istanbul
Tel: +90 216 4997081

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700

Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, São José dos Campos
Tel: +55 080 0727 5374

CL – Chile, Santiago
Tel: +56 22 303 9640

MX – Mexico, Toluca
Tel: +52 72 2275 4200

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

