

Quick-Acting Mould Couplers


Without Shut-Off



9020 Coupler with Hosetail



Nickel-plated brass, HNBR




DN	ØD		G	L	L1	L2	kg
8	8	9020T08 08	21	60	44	28	0.050
	10	9020T08 10	21	60	44	28	0.054
	12	9020T08 12	21	65	48	32	0.063
12	13	9020T12 13	32	75	53	32	0.069
	16	9020T12 16	32	75.5	54	32.5	0.172

9040 Coupler, Female BSPP Thread



Nickel-plated brass, HNBR




DN	C		E	G	L	L1	kg
8	G1/4	9040T08 13	10.5	21	43	27	0.056
12	G1/2	9040T12 21	15	32	66	44	0.208

9075 Female Socket, Male BSPT Thread



Nickel-plated brass



DN	C		E	F	G	G1	L	L1	kg
8	R1/8	9075T08 10	10	6	21	17.5	32	21	0.028
	R1/4	9075T08 13	13	8	21	17.5	33	22	0.031
	R3/8	9075T08 17	13	8	21	-	24	-	0.023
12	R3/8	9075T12 17	13	10	32	25	41	27	0.073
	R1/2	9075T12 21	16	14	32	25	44	30	0.075


Other coupler shapes are available on request:

- 90° angled body, with hosetail
- 45° angled body, female BSPP
- 90° angled body, female BSPP




Socket Installation

Two types of installation can be used for moulds. Sockets are fitted into the cavities using an Allen key.




Recessed Socket

This type of installation is recommended for new moulds



Exposed Socket

This type of installation is suited to moulds with no existing cavity.



Quick-Acting Mould Couplers

These Parker Legris quick-acting couplers provide the **best compromise** between **technical performance and ease of use** while providing long-term, reliable temperature regulation.

Product Advantages

- Ergonomic**
 - Can be connected using one hand by simply pushing the coupler body into the socket
 - Knurled sleeve provides excellent grip
 - Compact
- Performance**
 - Direct and automatic sealing
 - Socket threads are pre-coated
 - Maximum flow rate




Applications

- Plastic Injection Moulding
- Cooling
- Die-Casting
- Rubber Overmoulding
- Printing
- Coating & Laminating

Technical Characteristics

Compatible Fluids	Cold water, coolants, hot water, oil
Working Pressure	0 to 10 bar
Working Temperature	-15°C to +90°C (water applications) For temperatures above 90°C, please contact us.

Component Materials

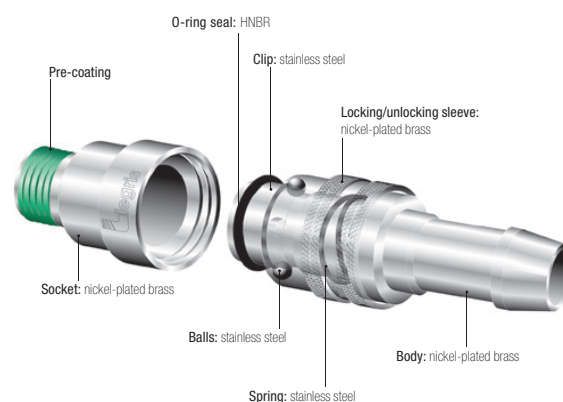

Installation

Cavity Dimensions

	G	G1	H	H1	H2
9075T08 10	21	22	33	24	22
9075T08 13	21	22	34	24	22
9075T08 17	21	22	25	13	11
9075T12 17	32	33	42	30	28
9075T12 21	32	33	45	30	28

